



## Flange Type Sewage Air Release Valve With SS 316 Internal Parts

Our Product Introduction

for more products please visit us on [watercontrol-valve.com](http://watercontrol-valve.com)

### Basic Information

- Place of Origin: China
- Brand Name: OEM
- Certification: ISO9001-2015
- Model Number: SKAR
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Plywood Cases
- Delivery Time: 15-60 Days
- Payment Terms: L/C, T/T
- Supply Ability: Based On Order




### Product Specification

- Material: Ductile Iron GJS500-7
- Internal Parts: SS316
- Coating: Fushion Bonded Epoxy
- Flow Area: Full Flow Area
- Color: RAL5010
- Specialty: Spill Free
- Highlight: **water supply valve**



### More Images



## Product Description

### Full Flow Area EN1074-4 Combination Sewage Air release valve Single Body Triple Function Flange Type

#### Forming Machine Process

1. CNC Lathe Processing
2. High precision CNC machining center processing
3. General lathe processing
4. The machine punch the product parts
5. Cold Forming Molding
6. Welding Assembly

#### Technical Data:

Size range: DN 50-200MM

Pressure ratings: 1.0Mpa, 1.6Mp (Flange)

Working temperature: -10°-80°C.

Flow media: sewage water.

Please consult factory for PN25 and antishock device whenever there is waterhammer issue.


- . Advanced design with simple mechanism, strong float to prevent cracking during sudden water hammer & quick closure.
- . Aerokinetic mechanism to resist blow shut under higher air velocity even up to sonic velocity of air.
- . With special fat body design to lower the sewage water flow speed, and let the air out but keep sewage water underneath.
- . Keep dirty or corrosive liquid inside the body for safety during operation and no harm to human & surrounding environment
- . Internal body guide and upper round wall keep float moving on its rail and keep liquid turbulence flow within this area.
- . Much bigger air flow through the nozzle even for higher viscosity liquid.
- . Outside screen will be an option for safety and prevent insects or birds in.
- . Fully fusion epoxy coated inside and outside of valve body for long term services.
- . Manufacturing standard meets BS EN 1074-4, AWWA C512. Flange drilling and dimension meets BS EN 1092 and ANSI flange.

#### Service Fields:

For sewage water system.

Quick Selection Table					
Water Flow Rate CMH	1360	4160	8500	19100	33400
Main pipe size MM	80-400	400-700	750-1000	1050-1500	1500-2000
Size of SKAR MM	50	80	100	150	200


#### Material:

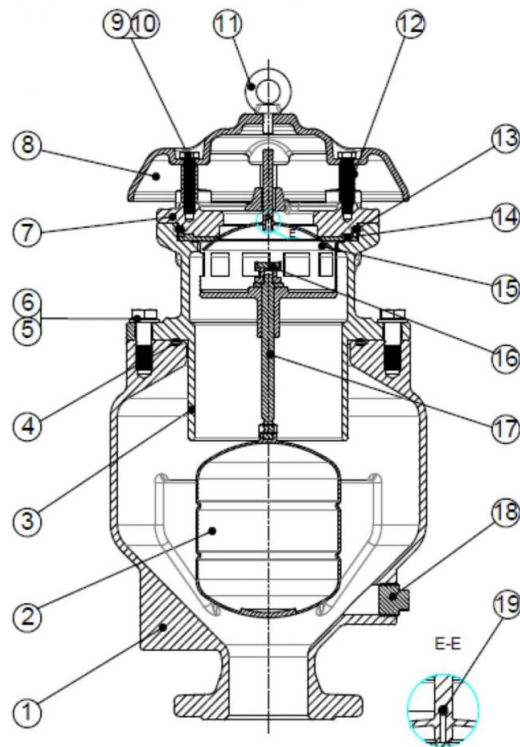

No.	Part Name	Material	Standard
1	Body	Ductile Iron	EN GJS 500-7
2	Float	Stainless Steel	AISI 304/316L
3	Middle Part	Ductile Iron	EN GJS 500-7
4	O-Ring	Rubber	NBR
5	Hex Bolt	Stainless Steel	AISI 304
6	Washer	Stainless Steel	AISI 304
7	Bonnet	Ductile Iron	EN GJS 500-7
8	Cover	Ductile Iron	EN GJS 500-7
9	Washer	Stainless Steel	Commercial/AISI 304/316
10	Hex Bolt	Stainless Steel	Commercial/AISI 304/316
11	Eyebolt	Carbon Steel	Commercial
*12	Pillar	Aluminium	Commercial
13	O-Ring	Rubber	NBR
14	Seat	Rubber	NBR
15	Sealing Arc	Stainless Steel	AISI 304/316L
16	Orifice Seat	Rubber	NBR
17	Stem	Stainless Steel	AISI 304/316L
18	Plug-Option	Stainless Steel	AISI 304/316L
19	Small Orifice	Stainless Steel	AISI 304/316L

\* Size ≥ DN150 have no pillar.

**Dimension:**

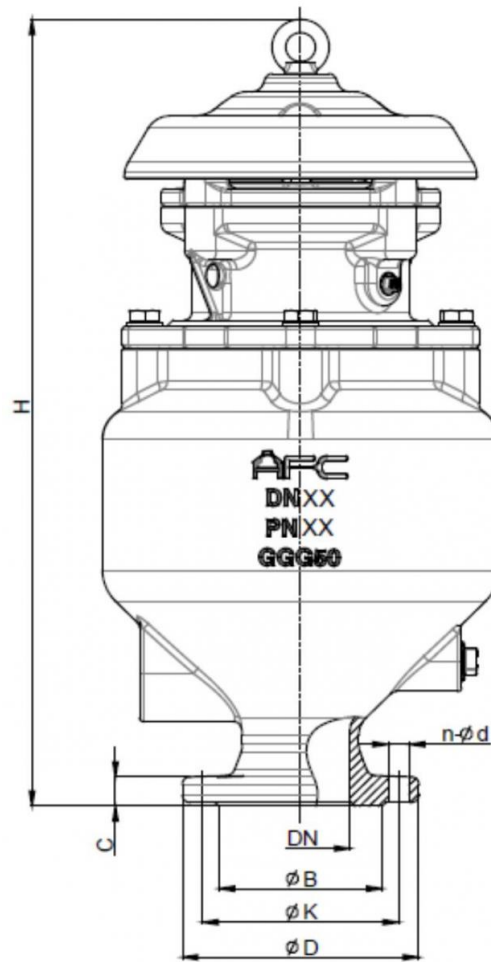

Unit: MM

DN	Model No.	H	ØD		ØK		ØB		n-Ød		C
			PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16	
50	SKAR-0050	558	165		125		99		4-Ø19		19
80	SKAR-0080	653	200		160		132		8-Ø19		19
100	SKAR-0100	676	220		180		156		8-Ø19		19
150	SKAR-0150	810	285		240		211		8-Ø23		19
200	SKAR-0200	950	340		295		266		8-Ø23	12-Ø23	20



**Beijing Silk Road Enterprise Management Services Co.,LTD**



17733330123



micleanmo@gmail.com



watercontrol-valve.com

18-2 JinFu East Rd. Ulks Village. Futian New district. Shenzhen. China.