



2 Way / 3 Way Spring Return Electric Ball Valve For FCU / HVAC System

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: OEM
- Certification: CE
- Model Number: SW-B252
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Plywood Cases
- Delivery Time: 15-60 Days
- Payment Terms: L/C, T/T
- Supply Ability: Based On Order



Product Specification

- Material: Brass
- Pressure: Medium Pressure
- Application: HVAC System
- Structure: Spring-return
- Power: Electric
- Media: Water
- Port Size: 1/2"~1"
- Standard Or Nonstandard: Standard
- Connection: Thread
- Voltage: 220VAC
- Highlight: electrically operated valve



for more products please visit us on watercontrol-valve.com

Product Description

220VAC 2-Way/3-Way 15-25mm Electric Spring Return Zone Valve for FCU/HVAC

Instruction of operation and Installation

1. Feed line and return pipe of differential pressure should be controlled within the range allowed pressure difference.
 2. The valve should be installed somewhere easy to install and maintain.
 3. Horizontal installation, that's mean the motor should be in the above of valve body to avoid humidity.
 4. When install 2 way valve, B side should be infall and A side should be outfall (A, B signed on the bottom of valve body)
 5. When install 3 way valve, infall is on the bottom of valve (no signal showed)
- Pay attention to The 3 way valve, B side is NC and a side is NO, so install outfall pipe, B side should be connected with main pipe and A side should be connected with by pass pipe, please refer to figure 3.

Open valve manually, should push operation pole out softly, when operation pole is on the above of block ora, push down softly and make operation pole just on the place of block ora, now the valve is just on the station of full connect. Poke operation pole up, the valve could auto reset through spring revert power, the valve could work normal again.

Brief Instruction

This series of Motor Valve is used for the control of the ends of center ANC. Thermostat control the motor of the Valve, and make on/off through speed-down machine and reset spring to carry out the break/on of the hot/cold water in the pipe.

How do we control the quality of machining

1. High-precision CNC lathe processing parts.
2. Advanced Milling Machines
3. UT Inspection to ensure welding quality
4. Weld Polishing
5. 100% Appearance & Size Inspection online (thickness, roundness, etc.)
6. Size & Appearance Shaping

Main Specification

Forging brass valve body

Stainless steel base, aluminum shell Totally enclosed uni-directional hysteresis synchronous motor drive, stainless steel spring return Electric valve is divided into normal close 2-way valve and bypass the 3-way valve Motor voltage and valve body to take over the form can be custom made according to customer requirements

Main Specification

1. Power supply: 220V +/- 10% 50Hz~60Hz
2. Power: <6.5W
3. Pressure: 1.6MPa
4. Valve Action time:

Fission valve: open time 14~18s closing time 5~7s
Form-fitting valve: open time 8~12s closing time 3~5s

5. Working Circumstance:

Air temperature: 5~40℃
Pipe water fluxion temperature: 5~90℃

6. Type, Model, Turnover Capability refer the table:

P/N	Port Size	Way	KV Value	Close PΔ Mpa
DN15 (2-way)	1/2" (15mm)	2-way	2.2 (2.5)	0.22
DN15 (3-way)	1/2" (15mm)	3-way	2.6 (3.0)	0.22
DN20 (2-way)	3/4" (20mm)	2-way	3.0 (3.5)	0.20
DN20 (3-way)	3/4" (20mm)	3-way	3.4 (4.0)	0.20
DN25 (2-way)	1" (25mm)	2-way	6.9 (8.0)	0.18
DN25 (3-way)	1" (25mm)	3-way	6.5 (7.5)	0.18

Product size

Figure 1, figure 2 is to use tools to dissect the electric valve installation size figure shape.

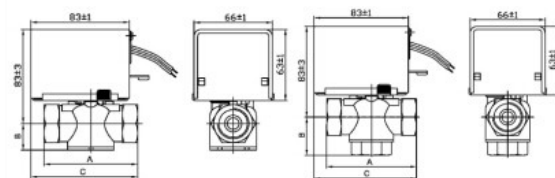


Figure 1, 2-way

Figure 2, 3-way

Refer table for the product size

P/N	A	B	C
DN15 (2-way)	72	23	88
DN15 (3-way)	72	36	88
DN20 (2-way)	86	23	96
DN20 (3-way)	86	37	96
DN25 (2-way)	88	23	98
DN25 (3-way)	88	42	98





17733330123



miclecleanmo@gmail.com



watercontrol-valve.com

18-2 JinFu East Rd. Ulks Village. Futian New district. Shenzhen. China.