



Flanged Ductile Iron Gate Valve With Handwheel / Cap Operator

Our Product Introduction

for more products please visit us on watercontrol-valve.com

Basic Information

- Place of Origin: China
- Brand Name: OEM
- Certification: WRAS, N1074-2, ISO 9001
- Model Number: GBCX, GBHX, GBBX
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Plywood Cases
- Delivery Time: 15-60 Days
- Payment Terms: L/C, T/T
- Supply Ability: Based On Order



Product Specification

- Material: Ductile Iron
- Stem: SS420, SS413, SS304, SS316
- Stem Nut: Brass, Bronze
- Coating: WRAS Powder
- Operator: Handwheel, Cap
- Wedge: DI With EPDM
- Highlight: ductile iron gate valve



More Images



Product Description

DN50-DN600 Ductile Iron Soft Seated Gate Valve, Non Rising Stem, BS5163, FBE Coated

1. Provide your technical requirements and drawings
2. Get primary reply from us within 12 hours
3. Get technical solution and quotation from us within 24 hours
4. Technical solution and quotation confirmation
5. Provide samples if necessary
6. Contract review and signing
7. Arrange production and shipment
8. After sales service

Production Process:

1. Sandblasting - To clean to castign to have a better adhesion while coating
2. Coating - By electrical spray gun or fluidize bed - WRAS, NSF approved
3. Assembling - By qualified workers
4. Testing - 100% tested with sell and seat test
5. Packing - Plywood crates.

Features:

1. Fully complied with BS5163, EN1074-1 and EN1074-2.
2. No deformation when 5 times of over torque operation.
3. Overcome vaccum when water stops. No sucking dirt or sand from outside of the valve.
4. Low Torque with advanced design.
5. Online repair by 5 pcs of o-rings for stem seal.
6. AWWA flange is available.

Model Code:

GBHX :


G: Gate valve

B: British Standard, A: AWWA Standard, 4: DIN standard, S: Australia Standard

H: Handwheel operated, C: Cap, B: Bare Head

X: Preserved

Valve Sizes:

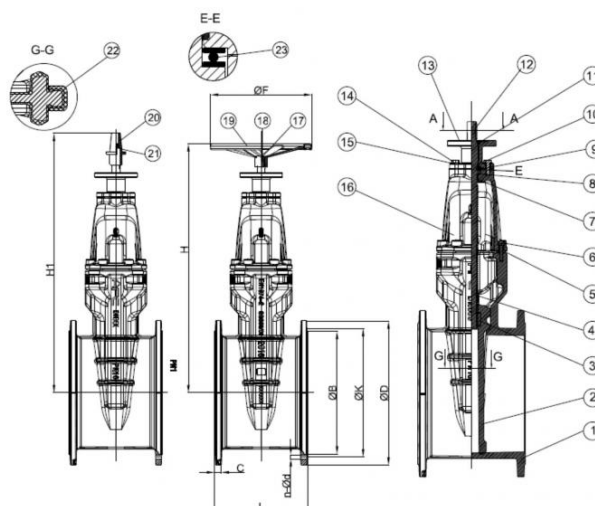

DIMENSION

DN	L	H	H1	ØB PN16	ØD PN16	ØK PN16	n-Ød PN16	C PN16	ØF
450	432	1025	1105	548	640	585	20-Ø31	30	500
500	457	1153	1235	609	715	650	20-Ø34	31,5	600
600	508	1310	1395	720	840	770	20-Ø37	36	600

Material :

Valve Body	DI GJS500-7
Valve Bonnet	DI GJS500-7
Valve Gland	DI GJS500-7
Wedge	DI GJS500-7 with fully vulcanized EPDM
Stem	SS420/SS431
Stem nut	Brass/Bronze

O-ring	NBR
--------	-----



Beijing Silk Road Enterprise Management Services Co.,LTD



17733330123



miclecleanmo@gmail.com



watercontrol-valve.com

18-2 JinFu East Rd. Ulks Village. Futian New district. Shenzhen. China.