



Ductile Iron GJS500-7 Water Gate Valve FBE Coated AWWA Flange Available

Our Product Introduction

for more products please visit us on watercontrol-valve.com

Basic Information

- Place of Origin: China
- Brand Name: OEM
- Certification: WRAS, N1074-2, ISO 9001
- Model Number: GBCX, GBHX, GBBX
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Plywood Cases
- Delivery Time: 15-60 Days
- Payment Terms: L/C, T/T
- Supply Ability: Based On Order



Product Specification

- Material: Ductile Iron
- Stem: SS420, SS413, SS304, SS316
- Stem Nut: Brass, Bronze
- Coating: WRAS Powder
- Operator: Handwheel, Cap
- Wedge: DI With EPDM
- Highlight: ductile iron gate valve



More Images



Product Description

Ductile Iron Resilient Seated Gate Valve, FBE Coated

Surface Treatment

We offer the following processes to choose:

1. Mechanical Polishing (MP) to improve brightness (gloss, matte)
2. Acid Cleaning for Anti-corrosion
3. Electrolysis Polish (EP) to improve surface smoothness
4. Custom Process: Bright Annealing treatment eliminate stresses to improve toughness

Features:

1. Meet BS5163, EN1074-1 and EN1074-2 standard.
2. Without deformation when 5 times of over torque operation.
3. Overcome vacuum when water stops. No sucking dirt or sand from outside of the valve.
4. Low Torque with advanced design.
5. Online repair by 5 pcs of o-rings for stem seal.
6. AWWA flange is available.

Production Process:

1. Sandblasting - To clean the casting to have a better adhesion while coating
2. Coating - By electrical spray gun or fluidized bed- WRAS, NSF approved
3. Assembling - By experienced workers
4. Testing - 100% tested with shell and seat test
5. Packing - Plywood crates.

Model Code:

GBHX :


G: Gate valve

B: British Standard, A: AWWA Standard, 4: DIN standard, S: Australia Standard

H: Handwheel operated, C: Cap, B: Bare Head

X: Preserved

Valve Sizes:

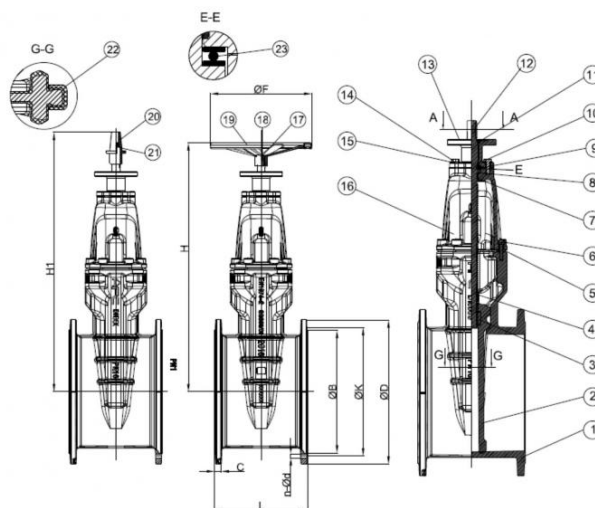

DN	L	H	H1	ΦD PN16	Φk PN16	n-Φd PN16	C PN16	ΦF
450	432	1105	548	640	585	20-Φ31	30	500
500	457	1235	609	715	650	20-Φ34	31.5	600
600	508	1395	720	840	770	20-Φ37	36	600

Material :

Valve Body	DI GJS500-7
Valve Bonnet	DI GJS500-7
Valve Gland	DI GJS500-7
Wedge	DI GJS500-7 with fully vulcanized EPDM
Stem	SS420/SS431
Stem nut	Brass/Bronze
O-ring	NBR



Beijing Silk Road Enterprise Management Services Co.,LTD



17733330123



miclecleanmo@gmail.com



watercontrol-valve.com

18-2 JinFu East Rd. Ulks Village. Futian New district. Shenzhen. China.