



High Performance Water Gate Valve , Resilient Seated Wedge Gate Valve

Our Product Introduction

for more products please visit us on watercontrol-valve.com

Basic Information

- Place of Origin: China
- Brand Name: OEM
- Certification: ISO9001, EN1074-2
- Model Number: GBHX, GBCX, GBBX
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Plywood Cases
- Delivery Time: 15-60 Days
- Payment Terms: L/C, T/T
- Supply Ability: Based On Order



Product Specification

- Operator: Handwheel
- Valve Body: Ductile Iron GJS500-7
- Wedge: Ductile Iron With Vulcanized Rubber
- Guide: Nylon 66
- Color: Red, Blue
- Powder: WRAS Approved
- Highlight: ductile iron gate valve



More Images



Product Description

BS5163 Water Gate Valve, Low Operation Torque, Resilient Seated Wedge

Features:


1. Conform BS5163, EN1074-1 and EN1074-2 standard.
2. Over torque can be 5 times without deformation.
3. External pressure test to prevent vacuum happened when water stops in pipe line. No sucking dirt or sand from outside of the valve.
4. Low operation torque.
5. Online repair by 5 pcs of o-rings for stem seal.
6. AWWA flange is available.

Spec:

Size	DN50-DN600
Working Temperature	- 10 C- 80 C
Flange	PN10/16
Flow Media	Water, Sewage Water
Face to Face	EN558-1

Production Process:

1. Sandblasting - Clean the rusty casting and give enough roughness for casting.
2. Coating - Fusion Bonded EPOXY - WRAS, NSF approved
3. Assembling - By qualified workers
4. Testing - 100% tested with shell (1.5 * PN) and seat test (1.1 * PN)
5. Packing - Plywood crates for exporting business.

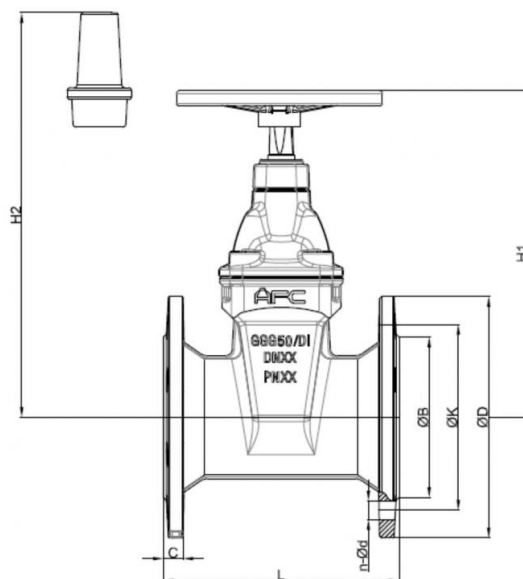

DN	L	H1	H2	ΦB	ΦD		ΦK		N-Φd		C		ΦF
					PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16	
50	178	240	255	99	165		125		4-Φ19		19		180
65	190	258	280	118	185		145		4-Φ19		19		180
80	203	293	311	132	200		160		8-Φ19		19		200
100	229	326	340	156	220		180		8-Φ19		19		200
125	254	377	386	184	250		210		8-Φ19		19		250
150	267	414	430	211	285		240		8-Φ23		19		250
200	292	510	550	266	340		295		8-Φ23	12-Φ23	20		300
250	330	585	628	319	395	405	350	355	12-Φ23	12-Φ28	22		350
300	356	663	703	370	445	460	400	410	12-Φ23	12-Φ28	24.5		350
350	381	880	930	429	505	520	460	470	16-Φ23	16-Φ28	24.5	26.5	450
400	406	990	1040	480	565	580	515	525	16-Φ28	16-Φ31	24.5	28	450



Beijing Silk Road Enterprise Management Services Co.,LTD



17733330123



miclecleanmo@gmail.com



watercontrol-valve.com

18-2 JinFu East Rd. Ulks Village. Futian New district. Shenzhen. China.